


NOVIBLE

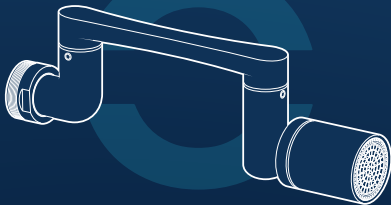

1440°
SWIVEL

FAUCET EXTENDER

User Manual

ENGLISH VERSION


Available Online

FR • DE • IT • ES

Valued User,

Thank you for your purchase! For best performance and safety, please read all instructions carefully before use and retain this manual for future reference.

1. PACKAGE CONTENTS



1440° Swivel Faucet
Extender x1



Gasket for M24 Female
Faucet Thread x1




Gasket for M22 Male
Faucet Thread x1



Gasket for M20 Male
Faucet Thread x1



Open-End Wrench x1




Allen Key x1



User Manual x1

2. PRODUCT OVERVIEW

Designed for convenience, this 1440° SWIVEL FAUCET EXTENDER provides flexible movement to reach every corner of your sink. It offers stream and spray modes for different uses and fits most standard faucets for a fast, hassle-free installation.

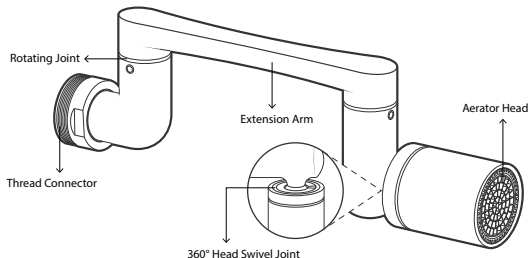

3. FEATURES

- Multiple Joints for 1440° Full Rotation
- Jet Control: Stream and Spray Modes
- Easy Installation with Included Gaskets and Tools
- Made of durable chrome-plated brass

4. COMPATIBILITY

Designed to fit standard faucet thread types: M24 female, M22 male, and M20 male. Included gaskets ensure a tight, leak-resistant seal for each connection.

5. HOW TO CHOOSE THE CORRECT SETUP

Thread Types (Quick Guide):

- A. Female thread = internal thread (inside the faucet opening)
- B. Male thread = external thread (outside the faucet tip)

Setup Selection:

Your faucet thread	Product connection	Matching gasket	
M24 female faucet thread	M24 male product connection	Gasket for M24 Female Faucet	
M22 male faucet thread	M22 female product connection	Gasket for M22 Male Faucet	
M20 male faucet thread	M20 female product connection	Gasket for M20 Male Faucet	

Note: Remove the existing aerator before checking the thread type

Important Note: Not compatible with faucets without a removable aerator or with non-standard thread sizes unless a suitable adapter is used.


6. INSTALLATION STEPS

Step 1: Turn off the Tap:

Turn off the tap before installation.

Step 2: Remove the Old Aerator:

Unscrew and remove the existing aerator from the faucet.





Step 3: Identify your Faucet Thread Type:

Check if your faucet thread is M24 female, M22 male, or M20 male.

Step 4: Select the Correct Setup:


Choose the correct product connection and gasket:

M24 female faucet	M24 male connection	Gasket for M24 Female Faucet
M22 male faucet	M22 female connection	Gasket for M22 Male Faucet
M20 male faucet	M20 female connection	Gasket for M20 Male Faucet




Step 5: Insert the Matching Gasket:

Place the correct gasket into the product connection.




Step 6: Screw the Extender onto the Faucet:

Screw the extender by hand.



Step 7: Tighten Gently if Needed:

Use the open-end wrench only if hand-tightening is not enough.



Step 8: Test for Leaks:

Turn on the water slowly and check for leaks.




7. TOOL USAGE – OPEN-END WRENCH AND ALLEN KEY

A. Open-End Wrench:

Purpose:


- Use only if hand-tightening is not enough.
- Tighten gently.
- Do not overtighten.

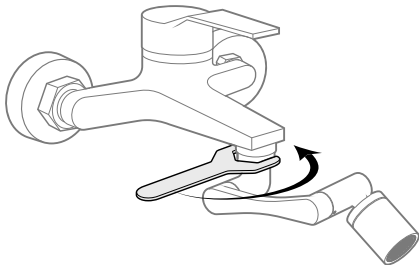

B. Allen Key / Joint Adjustment:

- Tighten slightly if the arm feels loose or falls down.
- Loosen slightly if the rotation feels too hard.
- Adjust slowly, a small turn at a time.
- Do not force.
- Do not overtighten.


Tighten = More resistance
Loosen = Less resistance

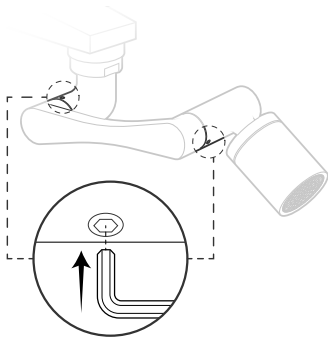

8. USAGE INSTRUCTIONS


1. Rotation:

Gently adjust the joints to direct the water where needed. Do not force the arm beyond its natural range of movement.




2. Jet Control:

Rotate the aerator head to switch between stream and spray modes.



3. Joint Resistance:

If the arm feels too loose or too tight, adjust the joint screw gently with the Allen key. See the Tool Usage section.



9. CARE & MAINTENANCE


- Clean the surface regularly with a soft cloth and water.



- Avoid harsh chemicals or abrasive cleaning materials.



- If water flow decreases, unscrew the aerator head and rinse the filter to remove debris.

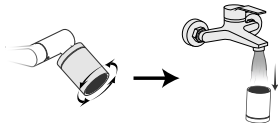

- Check that the gasket is clean and correctly positioned if leaks appear.
- Do not force the rotating joints during use or cleaning.

10. SAFETY INSTRUCTIONS

- Do not overtighten during installation to avoid damage.
- Ensure all connections are secure before use.
- Use only with compatible standard faucets.
- Keep small parts away from children.
- Do not apply excessive force when adjusting.

11. TROUBLESHOOTING - INSTALLATION, FITTING AND LEAKS

PROBLEM	SOLUTION
Leak at faucet connection	Check that the correct gasket is installed, the thread type matches your faucet, and the connection is gently tightened.
Leak from rotating joint	Check that the joint is correctly tightened. If the leak continues, stop using the product and contact support.
Does not fit	Make sure your faucet is M24 female, M22 male, or M20 male. This product may not fit non-standard faucets.
Hard to install	Do not force. Check thread alignment and make sure you are using the correct connection and gasket.
Loose connection	Align the threads properly and tighten gently by hand, then use the open-end wrench if needed.

11. TROUBLESHOOTING - INSTALLATION, FITTING AND LEAKS

PROBLEM	SOLUTION
Arm feels loose / falls down	Gently tighten the joint screw with the Allen key until the arm stays in position.
Rotation feels too hard	Do not force the arm. Slightly loosen the joint screw with the Allen key if needed.

12. TROUBLESHOOTING – WATER FLOW AND USAGE

PROBLEM	SOLUTION
Low water pressure	Unscrew the aerator head and rinse the filter to remove debris.
Uneven flow	Clean the filter and outlet holes. Make sure the aerator head is fully switched to one mode.
Water spraying oddly	Check that the aerator head is clean and that the spray mode is correctly selected.
Dripping after use	A few drops may remain after turning off the tap. If dripping continues, check the gasket and sealing.
Noise during use	Check for debris in the filter, improper installation, or excessive water pressure.

13. COMPANY INFORMATION

Brand:	NOVIBLE
Product:	1440° Swivel Faucet Extender
Company Name:	Arauzo Brothers SARL
Address:	35 rue du Met, 77600 Bussy-saint-Martin, France
Contact Email:	contact@novible.eu